


SEALTITE TYPE "E" MULTI-RANGE WYE SEWER SADDLE INSTALLED AS PER MANUFACTURER'S RECOMMENDATION

HOLE SHALL BE CAREFULLY CORED AND BE SAME DIAMETER AS OUTSIDE DIAMETER OF LATERAL CONNECTOR.

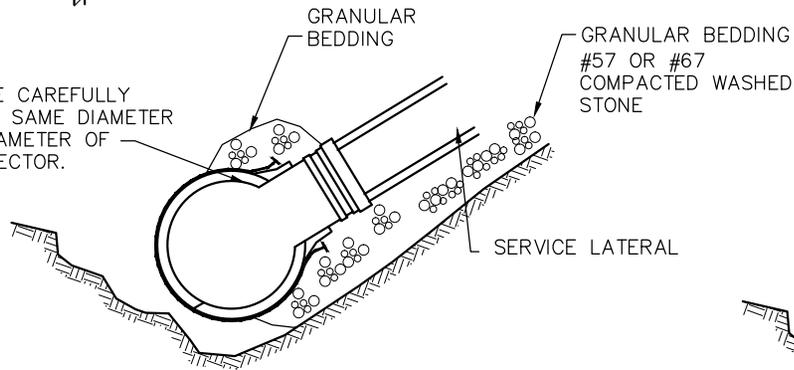

NOTES

- A.** A TEE MAY BE CUT IN OR SADDLE PLACED ONLY IF AN EXISTING LATERAL IS NOT PROVIDED.
- B.** ALL SADDLES AND CUTTING IN TEES MUST BE INSPECTED PRIOR TO COVERING, AND THE HOLE IN THE EXISTING PIPE SHALL BE INSPECTED AND APPROVED PRIOR TO INSTALLATION.
- C.** OTHER SADDLE TYPES THAT MAY BE APPROVED ON CASE-BY-CASE BASIS BY THE UTILITY DIRECTOR.
- D.** ON LOW FLOW AND PVC PIPE SDR 35 USE CUT IN TEE.

COUPLING (FOR CONNECTIONS DETAIL SEE REPAIR OF EXISTING SANITARY SEWER PIPE DETAIL 1167.86).

